

PLASMA CUTTING SYSTEM

EX-TRAFIRE® 125HD



INDUSTRIAL CUTTING. HEAVY-DUTY PERFORMANCE.

The plasma cutting systems in the **EX-TRAFIRE®** **HD** range are the absolute specialists in meeting tough demands in continuous operation. The mobile **EX-TRAFIRE® 125HD** plasma cutting system with 100% duty cycle is the perfect solution for demanding heavy duty applications in industry.



Heavy
Fabrication



Structural



Shipyards
and Offshore



Steel Mills and
Steel Service Center




General
Fabrication






EX-TRAFIRE® 125HD PLASMA CUTTING SYSTEM.

IMPRESSIVE PERFORMANCE



- + Extremely high cutting speed
- + Maximum cutting quality, even with long cuts
- + Also ideal for automated processes

HIGHEST FLEXIBILITY



- + Plate thicknesses up to 60 mm and more
- + For mechanized and manual applications
- + Gouging with high removal rate
- + Suitable for worldwide use

SIMPLE OPERATION



- + Large 4" LCD color display
- + Clear control panel
- + Self-explanatory icons
- + TCS for quick torch replacement

OPTIMAL COST-EFFECTIVENESS



- + Low investment costs
- + 20% longer consumable lifetime
- + Low operating costs
- + 100% duty cycle for maximum productivity

NEW CUTTING TORCH FHT®EX125TT



- + Torch design award winner
- + Optimized ergonomics
- + Relaxed PE and PA cutting
- + 100% duty cycle

MARKING



- + Automatic gas identification (air, nitrogen, argon)
- + Integrated gas-saving function
- + Fine, deep or wide markings
- + Optional Smooth-Marking for applications below 20 A marking current

READY FOR INDUSTRY 4.0



- + Industry leading connectivity
- + CAN / RS 485 and RS 422 interfaces (optional)
- + Easy monitoring
- + Expandable and updatable


AUTOMATIC SETTINGS



- + Cutting gas type, electricity and pilot current
- + Compensation for pressure drops
- + Fewer operating errors, better cutting quality

EX-TRAFIRE® 125HD

PLASMA CUTTING SYSTEM.



SPECIFICATION

Severance [mm]	60+ ⁽¹⁾
Recommended [mm]	40 ⁽¹⁾
Piercing [mm]	25 ⁽¹⁾
Gouging removal [kg/h]	12.5+

DUTY CYCLE (40 °C / 145 V)

100 %	@ 125 A
-------	---------

OUTPUT (VDC)

Nominal [V]	180
-------------	-----

INPUT

Voltage (VAC) [V/Hz]	3x400±15% ⁽²⁾ 50/60
Compressed air flow [lpm@bar]	200/5
Compressed air flow [lpm@psi]	200/72.5
Pressure (max.) [bar/psi]	10/145

MACHINE DATA

Dimensions W×L×H [mm]	613 x 302 x 515
Weight [kg]	42

TORCH (HAND/MACHINE)

FHT EX® 125TT


Designed to interface with a variety of CNC machines

(1) related to low-alloy steel (mild steel)

(2) suitable for generator use

THINK FRESH. CUT ORANGE.

THERMACUT® comes up with fresh ideas for cutting technology. Benefit from innovative, reliable, powerful and highly efficient cutting solutions.

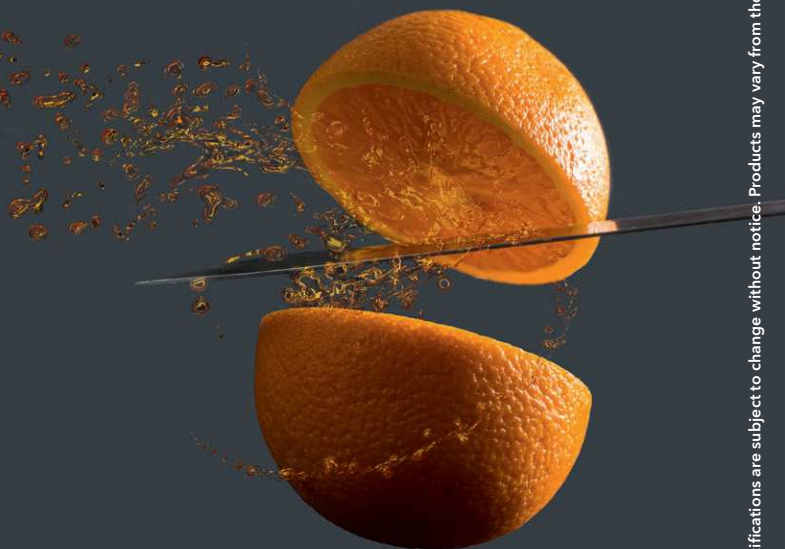

Discover the other plasma cutting systems within the **EX-TRAFIRE® HD** family and our wide range of cutting solutions at www.ex-trafire.com

WWW.THERMACUT.COM
SALES@THERMACUT.CZ

follow
#EXTRAFIRE



THERMACUT®, THE CUTTING COMPANY®, FHT-EX®, EX-TRAFIRE®, EX-TRACK®, EX-TRABEAM® AND EX-TRAFIRE® ARE REGISTERED TRADEMARKS OF THERMACUT, K.S. AND MAY BE REGISTERED IN CZECH REPUBLIC AND/OR OTHER COUNTRIES. ALL OTHER TRADEMARKS ARE PROPERTIES OF THEIR RESPECTIVE OWNERS.