

ERGOCUT S 125



CE EN60974-7



CODE	↔		
PAS706M-000-BA3	6 m	19.7'	 1/4 GAS
PAS706M-004-BA3	6 m	19.7'	 CENTRAL 004
PAS706M-304-BA3	6 m	19.7'	 TRAFIMECTOR® 304

TECHNICAL DATA		
NO HF	ERGOCUT S 125	
	0,7 kg	1.54 lb
V PEAK	500	
	5 bar	
	180 l/min	
X 60%	120A	
X 100%	90A	
	30-35 mm	1"3/16 - 1"3/8

For Central 004 and Trafimector 304 pin connection scheme see page 114

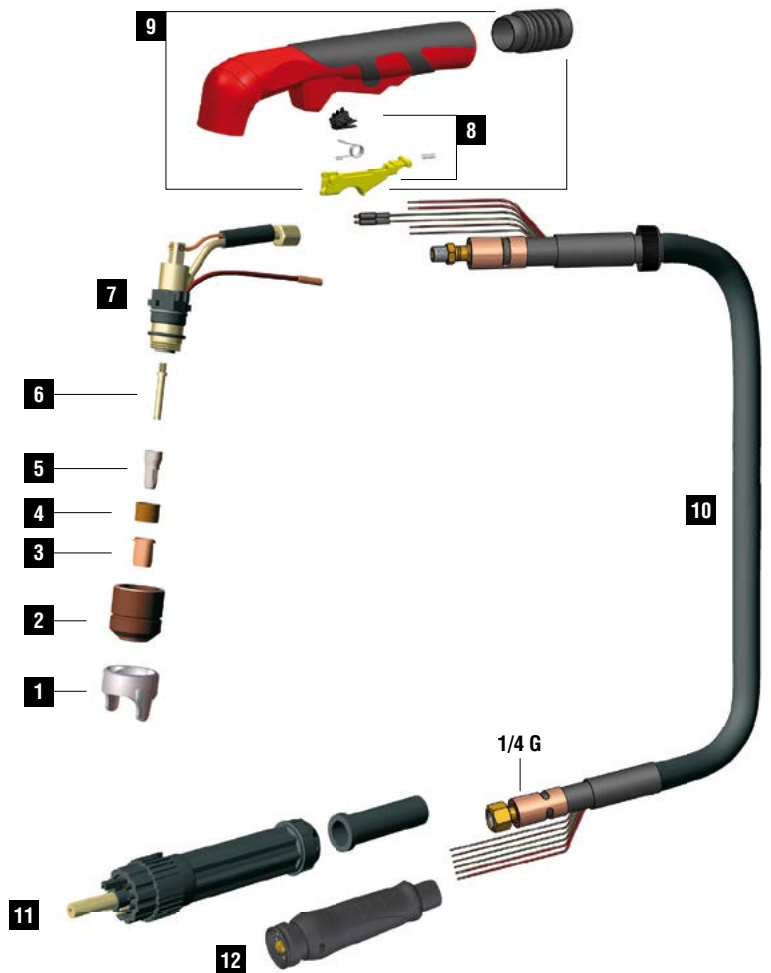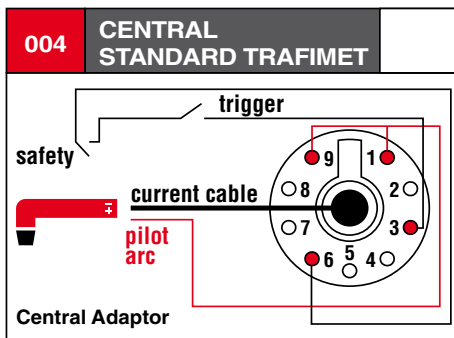

	CODE		Ø	↔		CONTACT		DRAG		GOUGING	REF	
1	CV0229		stand off guide			35,2 mm						2
2	PC0179		long life nozzle			39,5 mm						2
3	PD0179-13		80 A	1,3 mm	0.51"	20 mm					-	10
3	PD0179-14		100 A	1,4 mm	.055"	20 mm					-	10
3	PD0179-15		120 A	1,5 mm	.059"	20 mm					-	10
4	PE0179		diffuser			12,6 mm					-	2
5	PR0179		electrode			24,6 mm						10
6	FH0979		air tube			37 mm						10

	CODE		
7	EA0223		O-ring Ø 18x1 mm 10
7	PF0138		Ergocut S 125 torch head 1
8	TP0400		trigger kit 1
9	TP0402		handle kit 1
10	PH4003		coaxial cable - 6 m / 19.7' - 1/4 G (no pin) 1

	CODE		
11	BW0147		cable support 10
11	FY0023		plasma central adaptor - 5 pins 1
12	FY0090		TRAFIMECTOR® central adaptor - torch side 1
	EA0254		pin extractor for central adaptor 1
	PT0202		male spring pins kit (5 pcs) 1

STANDARD

CONTACT SHORT CONTACT LONG DRAG SHORT DRAG LONG GOUGING