

ERGOCUT CB 150



CE EN60974-7



CODE			
PAE306M-060-BA3	6 m	19.7'	 1/8 GAS
PAE306M-003-BA3	6 m	19.7'	 CENTRAL 003

For all pin connection schemes see page 114

TECHNICAL DATA		
 HF	ERGOCUT CB 150	
 1m	0,8 kg	1.76 lb
 V PEAK	500	
 5 bar		
 200 l/min		
 X 60%	150A	
 X 100%	110A	
 35-40 mm	1"3/8-1"9/16	

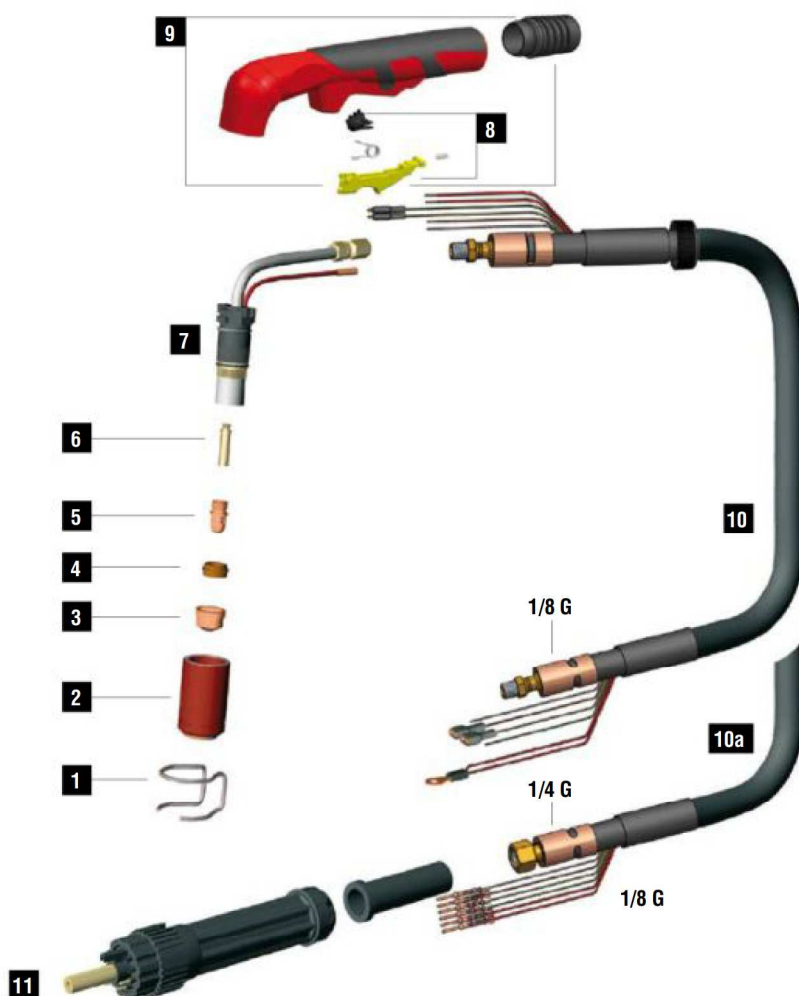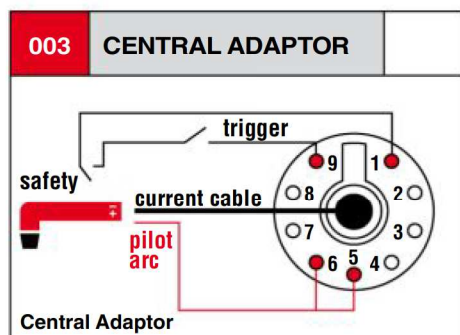

	CODE			Ø		CONTACT		DRAG		GOUGING	REF	
1	CV0008		stand off guide		32,5 mm						51957	10
1	CV0009		stand off guide		38,6 mm							10
1	CV0011		stand off guide		23 mm						1386	10
1	CV0012		stand off guide		30 mm						1408	2
1	CV0013		stand off guide		33 mm						1406	2
1	CV0021		stand off guide	32,8 mm	40,6 mm							1
1	CV0038		stand off guide		17 mm						51930	10
2	PC0002		long life nozzle		52,1 mm						1389	2
2	PC0034		long life nozzle		51,3 mm						60350	2
3	PD0025-14		100 A	1,4 mm	.055"	34,9 mm						10
3	PD0025-16		130 A	1,6 mm	.063"	34,9 mm						10
3	PD0025-18		150 A	1,8 mm	.071"	34,9 mm						10
3	PD0026-11		60 A	1,1 mm	.043"	14,1 mm					1371	10
3	PD0026-13		100 A	1,3 mm	.051"	14,1 mm					1372	10
3	PD0026-16		130 A	1,6 mm	.063"	14,1 mm					1373	10
3	PD0026-18		150 A	1,8 mm	.071"	14,1 mm					1374	10
3	PD0026-24		gouging tip	2,4 mm	3/32"	14,1 mm						10
3	PD0026-30		gouging tip	3,0 mm	1/8"	14,1 mm					1375	10
3	PD0028-13		100 A	1,3 mm	.051"	14 mm						10
3	PD0028-16		130 A	1,6 mm	.063"	14 mm						10
3	PD0028-18		150 A	1,8 mm	.071"	14 mm						10
3	PD0030-11		60 A	1,1 mm	.043"	35,7 mm					1369	10
4	PE0009		diffuser		7,9 mm						1377	2
5	PR0034		electrode		22 mm	7/8"					1376	10
5	PR0045		electrode		43 mm						1517	10
5	PR0245		electrode		43 mm						1517	10
6	FH0213		air tube		29,5 mm							1

	CODE					
7	EA0131		O-ring Ø 19x2 mm	10		
7	PF0080		Ergocut CB 150 torch head	1		
8	TP0400		trigger kit	1		
9	TP0402		handle kit	1		
10	PH4017		coaxial cable - 6 m / 19.7' - 1/8 G	1		

	CODE					
10a	PH4014		coaxial cable - 6 m / 19.7' - 1/4 G (pin included)	1		
11	BW0147		cable support	10		
11	FY0023		plasma central adaptor - 5 pins	1		
	EA0254		pin extractor for central adaptor	1		
	PT0202		male spring pins kit (5 pcs)	1		

STANDARD

CONTACT SHORT
 CONTACT LONG
 DRAG SHORT
 DRAG LONG
 GOUGING